



## U74HC00

CMOS IC


### QUADRUPLE 2-INPUT POSITIVE-NAND GATES

#### DESCRIPTION

The **U74HC00** is a Quadruple 2-input positive-NAND gate with provides the function  $Y = A \cdot B$  or  $Y = \overline{A + B}$ .

#### FEATURES

- \* Operation voltage range: 2.0 V ~6.0 V
- \* Low Quiescent Current:  $I_{CC}=2\mu A(\text{Max})$

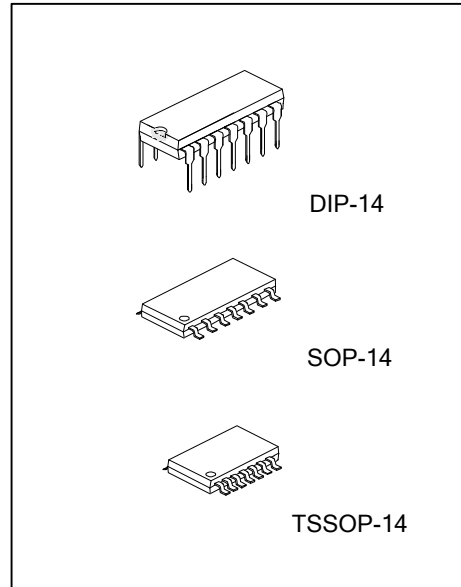

#### ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74HC00L-D14-T	U74HC00G-D14-T	DIP-14	Tube
-	U74HC00G-S14-R	SOP-14	Tape Reel
-	U74HC00G-P14-R	TSSOP-14	Tape Reel

<p>U74HC00L-D14-T</p> <p>(1) Packing Type</p> <p>(2) Package Type</p> <p>(3) Green Package</p>	<p>(1) R: Tape Reel, T: Tube</p> <p>(2) D14: DIP-14, S14: SOP-14, P14: TSSOP-14</p> <p>(3) L: Lead Free, G: Halogen Free and Lead Free</p>
--	--

#### MARKING

DIP-14	SOP-14 / TSSOP-14
<p>Date Code</p> <p>L: Lead Free</p> <p>G: Halogen Free</p> <p>Lot Code</p>	<p>Date Code</p> <p>Lot Code</p>


■ PIN CONFIGURATION

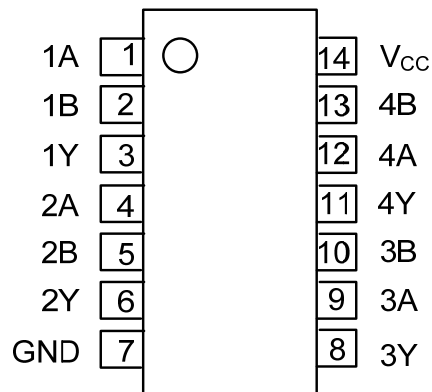

■ FUNCTION TABLE

INPUT		OUTPUT
A	B	Y
H	H	L
L	X	H
X	L	H

■ LOGIC DIAGRAM (positive logic)



■ ABSOLUTE MAXIMUM RATINGS (unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V_{CC}$	-0.5 ~ 7.0	V
Input Clamp Current	$I_{IK}$	±20	mA
Output Clamp Current	$I_{OK}$	±20	mA
Output Current	$I_{OUT}$	±25	mA
$V_{CC}$ or GND Current	$I_{CC}$	±50	mA
Storage Temperature	$T_{STG}$	-65 ~ +150	°C

Notes: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.  
 2. Absolute maximum ratings are those values beyond which the device could be permanently damaged.  
 Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	SOP-14	86	°C/W
	DIP-14	80	
	TSSOP-14	113	

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	$V_{CC}$		2	5	6	V
Input Voltage	$V_{IN}$		0		$V_{CC}$	V
Output Voltage	$V_{OUT}$		0		$V_{CC}$	V
Input Transition Rise or Fall Rate	$t_R, t_F$	$V_{CC} = 2V$			1000	ns
		$V_{CC} = 4.5V$			500	
		$V_{CC} = 6V$			400	
Operating Temperature	$T_A$		-40		85	°C

Note: All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation.

■ STATIC CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-Level Input Voltage	$V_{IH}$	$V_{CC} = 2V$	1.5			V
		$V_{CC} = 4.5V$	3.15			
		$V_{CC} = 6V$	4.2			
Low-Level Input Voltage	$V_{IL}$	$V_{CC} = 2V$			0.5	V
		$V_{CC} = 4.5V$			1.35	
		$V_{CC} = 6V$			1.8	
High-Level Output Voltage	$V_{OH}$	$V_{CC} = 2V, V_{IN} = V_{IH} \text{ or } V_{IL}, I_{OH} = -20\mu\text{A}$	1.9	1.998		V
		$V_{CC} = 4.5V, V_{IN} = V_{IH} \text{ or } V_{IL}, I_{OH} = -20\mu\text{A}$	4.4	4.999		
		$V_{CC} = 6V, V_{IN} = V_{IH} \text{ or } V_{IL}, I_{OH} = -20\mu\text{A}$	5.9	5.999		
		$V_{CC} = 4.5V, V_{IN} = V_{IH} \text{ or } V_{IL}, I_{OH} = -4\text{mA}$	3.98	4.3		
		$V_{CC} = 6V, V_{IN} = V_{IH} \text{ or } V_{IL}, I_{OH} = -5.2\text{mA}$	5.48	5.8		
Low-Level Output Voltage	$V_{OL}$	$V_{CC} = 2V, V_{IN} = V_{IH} \text{ or } V_{IL}, I_{OL} = 20\mu\text{A}$		0.002	0.1	V
		$V_{CC} = 4.5V, V_{IN} = V_{IH} \text{ or } V_{IL}, I_{OL} = 20\mu\text{A}$		0.001	0.1	
		$V_{CC} = 6V, V_{IN} = V_{IH} \text{ or } V_{IL}, I_{OL} = 20\mu\text{A}$		0.001	0.1	
		$V_{CC} = 4.5V, V_{IN} = V_{IH} \text{ or } V_{IL}, I_{OL} = 4\text{mA}$		0.17	0.26	
		$V_{CC} = 6V, V_{IN} = V_{IH} \text{ or } V_{IL}, I_{OL} = 5.2\text{mA}$		0.15	0.26	
Input Leakage Current	$I_{I(LEAK)}$	$V_{CC} = 6V, V_{IN} = V_{CC} \text{ or } 0$		±0.1	±100	nA
Quiescent Supply Current	$I_Q$	$V_{CC} = 6V, V_{IN} = V_{CC} \text{ or } 0, I_{OUT} = 0$			2	μA
Input Capacitance	$C_{IN}$	$V_{CC} = 2V \sim 6V$		3	10	pF

■ DYNAMIC CHARACTERISTICS ( $T_A=25^\circ\text{C}$ , Input:  $t_R=t_F=6\text{ns}$ ;  $\text{PRR}\leq 1\text{MHz}$ , unless otherwise specified )


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation Delay, (A) or (B) to (Y)	$t_{PLH}, t_{PHL}$	$V_{CC}=2\text{V}, C_L=50\text{pF}$		45	90	ns
		$V_{CC}=4.5\text{V}, C_L=50\text{pF}$		9	18	
		$V_{CC}=6\text{V}, C_L=50\text{pF}$		8	15	
Output Transition Times	$t_{TLH}, t_{THL}$	$V_{CC}=2\text{V}, C_L=50\text{pF}$		38	75	ns
		$V_{CC}=4.5\text{V}, C_L=50\text{pF}$		8	15	
		$V_{CC}=6\text{V}, C_L=50\text{pF}$		6	13	

■ OPERATING CHARACTERISTICS ( $T_A=25^\circ\text{C}$ , unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITION	RATINGS	UNIT
Power Dissipation Capacitance	$C_{PD}$	No Load	20	pF

Note: All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation.

■ TEST CIRCUIT AND WAVEFORMS

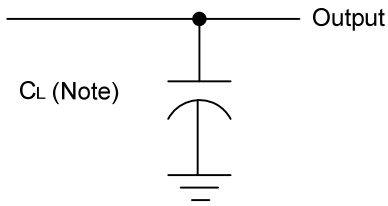

Note: CL includes probe and jig capacitance.

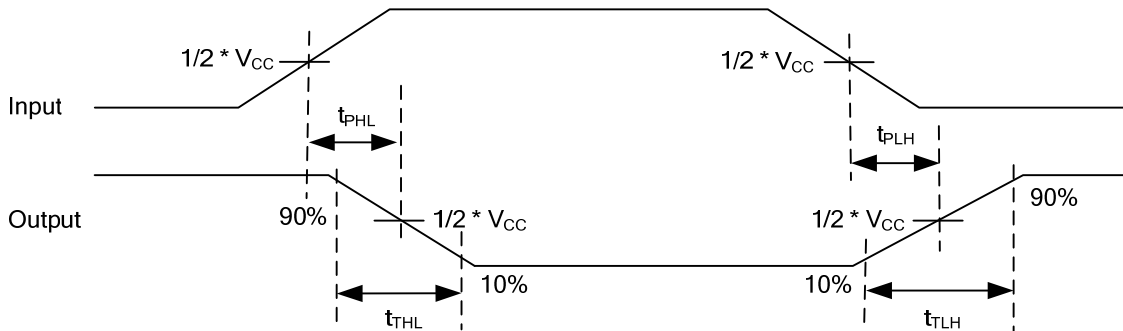

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.