



UL66X

Preliminary

CMOS IC

HIGH ACCURACY LINEAR CONSTANT CURRENT LED DRIVER

DESCRIPTION

The UTC **UL66X** is a linear constant current IC that need a external power MOSFET. The output current is determined by the external MOSFET, and constant current accuracy up to $\pm 4\%$. The application scheme is simple and the cost is low. This device also incorporates temperature compensation and thermal shutdown functions.

FEATURES


- * Output Current is determined by the external MOSFET
- * Up to $\pm 4\%$ Constant Current Accuracy
- * No EMC Problem
- * Temperature Compensate
- * Thermal Shutdown

ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
UL66XL-xx-AF5-R	UL66XG-xx-AF5-R	SOT-25	Tape Reel

Note: xx: Output Voltage, refer to Marking Information.

<p>UL66XG-xx-AF5-R</p>	<p>(1) Packing Type (1) R: Tape Reel</p> <p>(2) Package Type (2) AF5: SOT-25</p> <p>(3) Output Voltage Code (3) xx: Refer to Marking Information</p> <p>(4) Green Package (4) G: Halogen Free and Lead Free, L: Lead Free</p>
------------------------	---

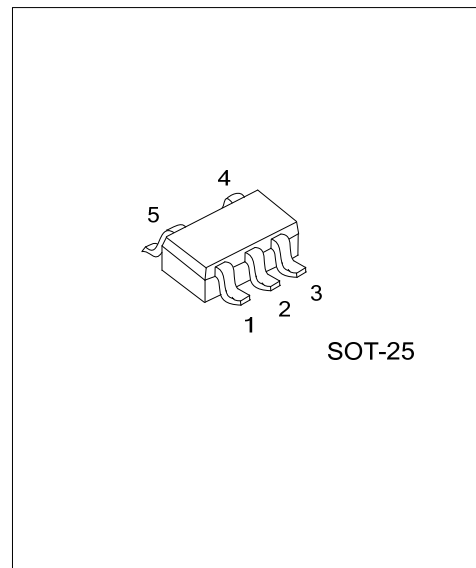


MARKING INFORMATION

PACKAGE	VOLTAGE CODE	MARKING
SOT-25	3: 0.3V 6: 0.6V	<p>The diagram shows a top-down view of the SOT-25 package with pins numbered 1 to 5. Pin 1 is at the bottom left, pin 2 is at the bottom center, pin 3 is at the bottom right, pin 4 is at the top right, and pin 5 is at the top left. A small square window is located between pins 3 and 4, labeled 'Voltage Code' with an arrow pointing to it.</p>

PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	GND	Current Output Pin.
2	NC	NO connect.
3	OUT	Current Output Pin.
4	GATE	Connect to the gate of external MOSFET Pin.
5	REXT	Output Current Setting Pin.

BLOCK DIAGRAM

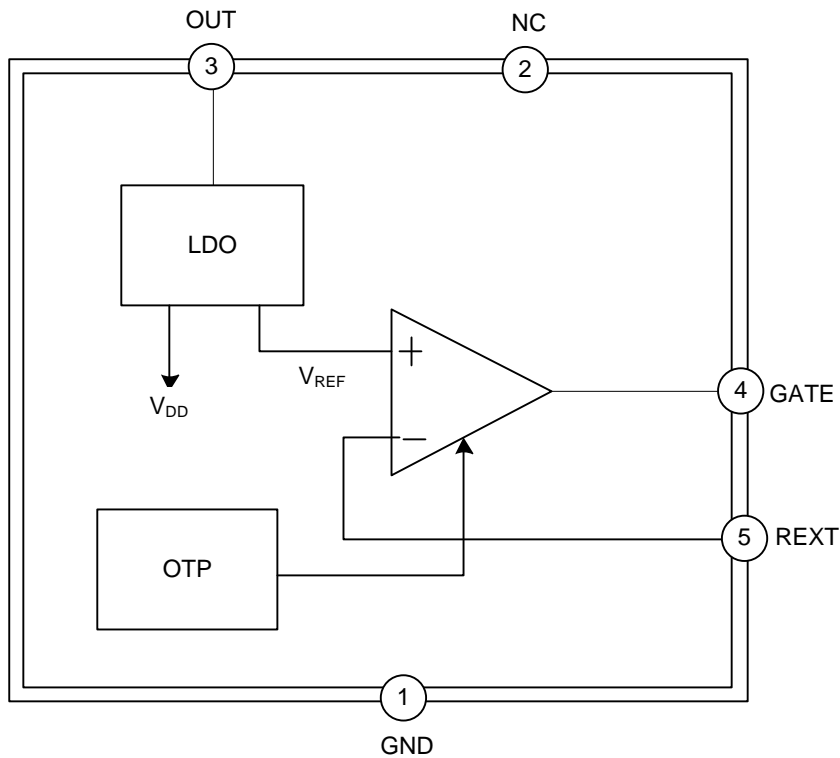

■ ABSOLUTE MAXIMUM RATING


PARAMETER	SYMBOL	RATINGS	UNIT
OUT Pin Voltage	V_{OUT}	-0.5 ~ 450	V
Operating Junction Temperature	T_{OPT}	-40 ~ +150	°C
Storage Junction Temperature	T_{STG}	-50 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OUT Pin Voltage	V_{OUT}	$I_{OUT}=30mA$	6.5			V
OUT Pin Withstanding Voltage		$I_{OUT}=0$	450			V
Quiescent Current	I_Q	$V_{OUT}=10V$ REXT No Collection		0.16	0.25	mA
REXT Pin Voltage	V_{REXT}	$V_{OUT}=10V$		0.3		V
				0.6		V
V_{REXT} Voltage Error		$I_{OUT}=5\sim 60mA$		± 4		%
Temperature Compensate Point	T_{CP}			140		°C

■ TYPICAL APPLICATION CIRCUIT

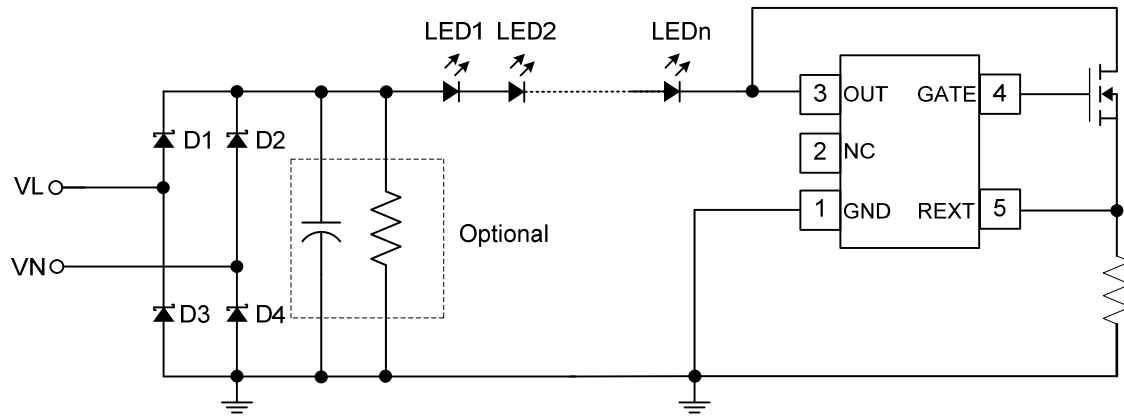

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.